


## ❖ FLAGGER-MAC AUTOMATED FLAGGER ASSISTANCE DEVICE (AFAD) (US VERSION)

The Ver-Mac Flagger-Mac is a trailer-mounted gate device designed for flagging operations. The Flagger-Mac system consists of two gate devices that are operated using a wireless remote controller. This technology allows the operator to fully control both devices from a safe location outside the work zone. Our Flagger-Mac also has an innovative breakaway arm mechanism in case of impact, adding an additional layer of protection for your workers while protecting your equipment.

Each Flagger-Mac unit is equipped with two 12-inch lamps, (1) red and (1) yellow, one gate with a flag, a V-Touch Controller with wireless remote, and stealth technology.

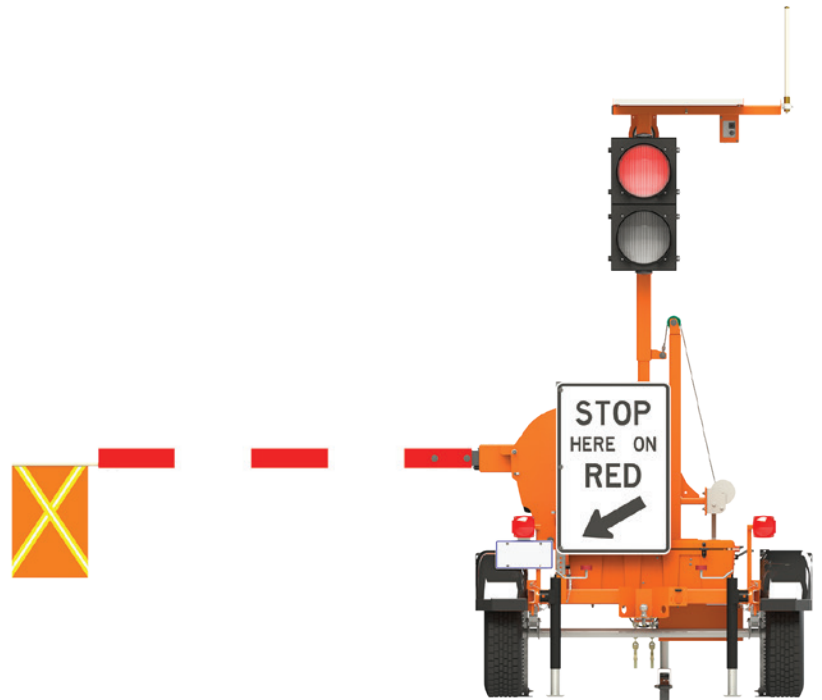

### V-TOUCH CONTROLLER

The Flagger-Mac comes with our intuitive, industry-leading V-Touch Controller.

- Large 7 in. (178 mm) LCD color graphic touch screen
- Intuitive point-and-go icons
- Large icons to raise and lower the gate
- Real-time display of battery / solar voltage, gate / yellow light timing



Wireless Remote

### APPLICATIONS

- City and county (urban areas)
- Secondary roads
- Bridge construction/repairs
- Utility projects

**FEATURES & BENEFITS**

**ROBUST WIRELESS REMOTE**

Operate 1 or 2 units up to 800 feet away

**V-TOUCH CONTROLLER**

Intuitive interface instantly provides real-time information

**ITE LAMPS**

Meet MUTCD standards and provide superior performance, reliability, and energy efficiency

**TOWING OPTION: NESTED OR TANDEM**

Save time and money by towing both units with the same truck

**RED INDICATOR LAMP AT THE BACK OF THE UNIT**

Allows the traffic control operator to monitor units in real time from a safe distance

**RADIO COMMUNICATION**

Meets MUTCD communication standards

**BREAKAWAY GATE MECHANISM**

In case of impact

**STEALTH TECHNOLOGY**

Maintenance-free batteries, anti-theft hidden battery compartment



**JAMLOGIC FLEET MANAGEMENT SOFTWARE**



Nested Tow Position

**GATE DIMENSIONS AND SPECIFICATIONS**

- Material: PVC
- Reflective tape
- Gate height: 4 in. (102 mm)
- Gate height off the ground (down position): 4 ft. (47.25 in. / 1200 mm)
- Gate length: 76 in. (1930.4 mm)
- Gate operating height (up position): 166 in. (4214 mm)

**UNIT DIMENSIONS AND WEIGHT**

- Operating height: 129 in. (3281 mm)
- Operating width: 169 in. (4288 mm)
- Traveling height: 100 3/4 in. (2559.05 mm)
- Traveling width: 70 in. (1788 mm)
- Overall length: 94 4/16 in. (2393.95 mm)
- Axle/suspension: 2000 lb (907 kg)
- Weight (approx.): 1000 lb (455 kg)

**OPTIONS**

- Battery charger
- Waze notification
- Additional gate length and reflective tape available
- Intrusion alarm
- Incident video and storage

Other options are available to meet your needs

**WARRANTY**

- 1 year on complete trailers
- 2 years on electronic components manufactured by Ver-Mac

