


❖ FLAGGER-MAC

AUTOMATED FLAGGER ASSISTANCE DEVICE (AFAD) (US VERSION)

The Ver-Mac Flagger-Mac is a trailer-mounted gate device designed for flagging operations. The Flagger-Mac system consists of two gate devices that are operated using a wireless remote controller. This technology allows the operator to fully control both devices from a safe location outside the work zone. Our Flagger-Mac also has an innovative breakaway arm mechanism in case of impact, adding an additional layer of protection for your workers while protecting your equipment.

Each Flagger-Mac unit is equipped with two 12-inch lamps, (1) red and (1) yellow, one gate with a flag, a V-Touch Controller with wireless remote, and stealth technology.

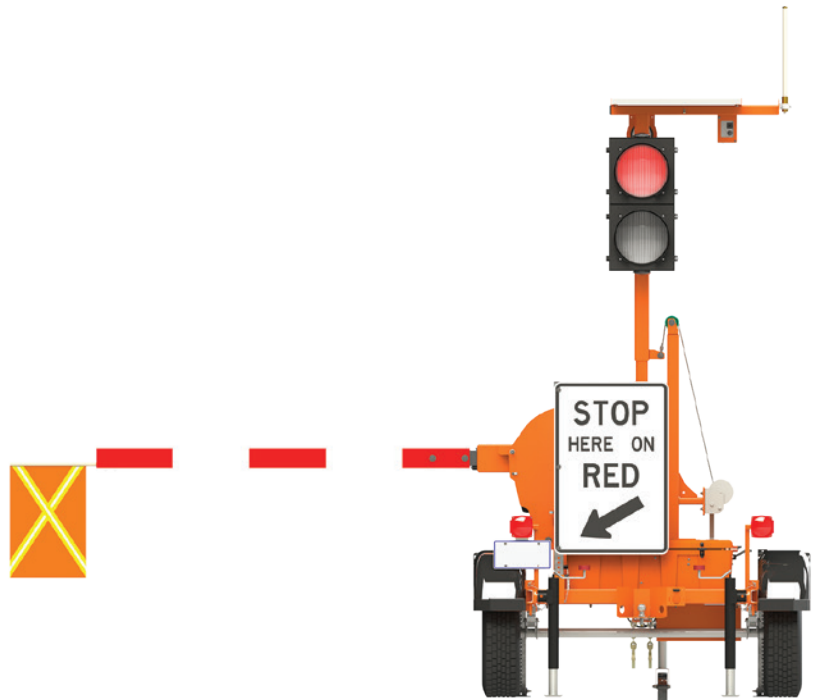

V-TOUCH CONTROLLER

The Flagger-Mac comes with our intuitive, industry-leading V-Touch Controller.

- Large 7 in. (178 mm) LCD color graphic touch screen
- Intuitive point-and-go icons
- Large icons to raise and lower the gate
- Real-time display of battery / solar voltage, gate / yellow light timing



Wireless Remote

APPLICATIONS

- City and county (urban areas)
- Secondary roads
- Bridge construction/repairs
- Utility projects

FEATURES & BENEFITS

ROBUST WIRELESS REMOTE

Operate 1 or 2 units up to 800 feet away

V-TOUCH CONTROLLER

Intuitive interface instantly provides real-time information

ITE LAMPS

Meet MUTCD standards and provide superior performance, reliability, and energy efficiency

TOWING OPTION: NESTED OR TANDEM

Save time and money by towing both units with the same truck

RED INDICATOR LAMP AT THE BACK OF THE UNIT

Allows the traffic control operator to monitor units in real time from a safe distance

RADIO COMMUNICATION

Meets MUTCD communication standards

BREAKAWAY GATE MECHANISM

In case of impact

STEALTH TECHNOLOGY

Maintenance-free batteries, anti-theft hidden battery compartment



JAMLOGIC FLEET MANAGEMENT SOFTWARE



Nested Tow Position

GATE DIMENSIONS AND SPECIFICATIONS

- Material: PVC
- Reflective tape
- Gate height: 4 in. (102 mm)
- Gate height off the ground (down position): 4 ft. (47.25 in. / 1200 mm)
- Gate length: 76 in. (1930.4 mm)
- Gate operating height (up position): 166 in. (4214 mm)

UNIT DIMENSIONS AND WEIGHT

- Operating height: 129 in. (3281 mm)
- Operating width: 169 in. (4288 mm)
- Traveling height: 100 3/4 in. (2559.05 mm)
- Traveling width: 70 in. (1788 mm)
- Overall length: 94 4/16 in. (2393.95 mm)
- Axle/suspension: 2000 lb (907 kg)
- Weight (approx.): 1000 lb (455 kg)

OPTIONS

- Battery charger
- Waze notification
- Additional gate length and reflective tape available
- Intrusion alarm
- Incident video and storage

Other options are available to meet your needs

WARRANTY

- 1 year on complete trailers
- 2 years on electronic components manufactured by Ver-Mac

